

ACOPTIC®

Options: jackets, colours, drums

Information relating to cable installation

Colour coding


Optical fibre number	International and European code	US code
1	Blue	Blue
2	Yellow	Orange
3	Red	Green
4	White	Brown
5	Green	Grey
6	Purple	White
7	Orange	Red
8	Grey	Black
9	Turquoise	Yellow
10	Black	Purple
11	Brown	Pink
12	Pink	Turquoise

Insulation and sheathing materials

	LSOH	Polyethylene (Pe)	PVC
Tensile strength	ppp	pppp	ppp
Flexibility	pp	ppp	ppp
Tearing resistance	ppp	pppp	ppp
Abrasion resistance	ppp	pppp	ppp
Service temperature	- 20 °C + 90 °C	- 40 °C + 70 °C	- 15 °C + 105 °C
Fire rating	ppp	p	ppp
Low opacity smoke emissions	pppp	ppp	p
Low acid gas emissions	pppp	pppp	p
Low toxicity of smoke	pppp	pppp	p

Drums

Type	Code	Flange	Barrel diameter	Effective width	Overall width
BCPA	920209	900	450	460	500
CCPA	920215	1050	580	460	500
DCCA	920233	1200	600	610	650
EBE	920165	1400	800	600	700
FBE	920166	1650	960	600	700
GBE	920167	1900	1200	950	1070
HBE	920168	2200	1400	1000	1140
IBE	920169	1600	1600	1000	1150

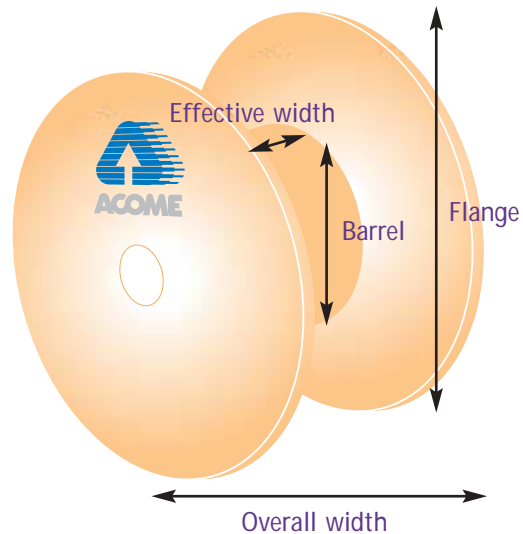

Euro pallet

- Length x width 1200 x 800
- Height : 144