


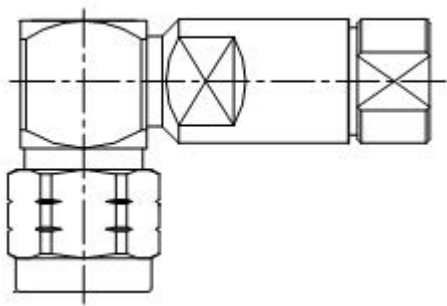

C0065E HYPERCELL

HPL N male elbow connector

GENERAL CHARACTERISTICS

Inner Conductor:	Silver - plated bronze
Dielectric:	PTFE
Body:	Copper alloy - plated brass
Clamping and Coupling Nut:	Nickel - plated brass
Clamping Nut Waterproof:	Silicone O-ring
Coupling Waterproof:	Silicone gasket

ELECTRICAL

Impedance:		$50 \pm 1\Omega$
Operating Frequency Band:		DC ~ 4GHz
VSWR:	DC~3GHz	≤ 1.10
	2.2~3GHz	≤ 1.135
	3~4GHz	≤ 1.20
3rd Order Passive Intermodulation, Measured In Swept Frequency Mode with $2 \times 20W$ carriers, $F \leq 1880$ MHz:	Static:	≤ -155 dBc
	Dynamic:	≤ -145 dBc
Voltage Test (at sea level):		1500 V eff / 50 Hz
Operating Voltage (at sea level):		900 V eff / 50 Hz
Insulation Resistance:		≥ 5000 M Ω
Contact Resistance:	Inner contact:	≤ 1.5 m Ω
	Outer contact:	≤ 1.0 m Ω

MECHANICAL & ENVIRONMENTAL

Interface Durability:	500 cycles	
Temperature:	Operating	-40°C / +85°C
	Storage	-40°C / +85°C
Weight:	95 g	
Waterproof Index:	IP68	
RoHS Compliance:	Yes	

RANGE

Compatibility with ACOME HPL 50 -1/4F

M2930, M2932, M5309

Test Methods: IEC 60169-16, IEC 62037-3, IEC 60529

RECOMMENDATIONS

INSTALLATION INSTRUCTION

ANM - C0065E

RECOMMENDATIONS

Suivre les instructions de mise en œuvre avant d'installer ce connecteur sur le câble.