


LCA study reference: Ecobilan-;Z_@J]-BSBC\BAZ_F->#55%-BZ]->#55-C->#56-B-58,=->#<"7/-	
Self declaration according to ISO 14021	
LCA according to ISO 14040-44	
ECOBILAN software version:	V27-04
Database :	Base CODDE® 2025-04+ supplier data
Date of publication:	04-03-26

## ECOBILAN OPTICAL FIBRE CABLE\_ACOPTIC

# CCC1378 96F M12

### Lifecycle Analysis Results

Carbon equivalent emissions (i.e. carbon footprint in gCO<sub>2</sub>-eq) over the complete life cycle, for 1 metre of cable delivered to our customers at a distance of 1000km by lorry from our manufacturing plant and packaged in 4000m lengths on GBE :

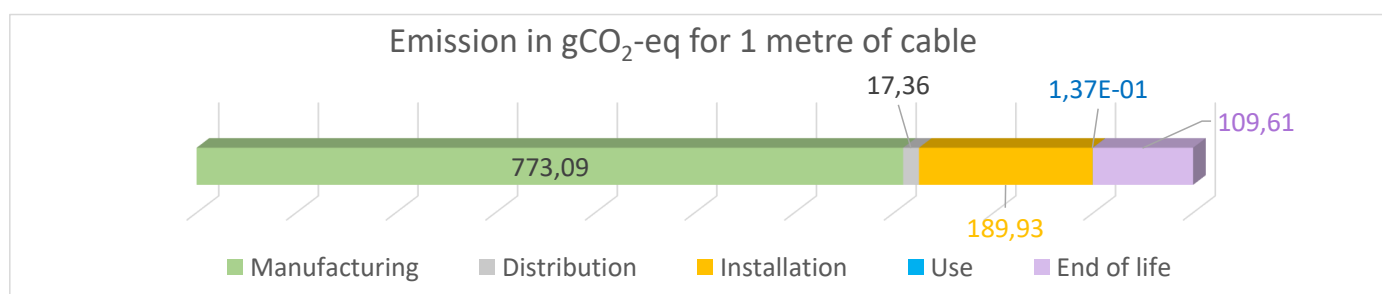

CCC1378 96F M12	Carbon Footprint "cradle-to-gate"*	Carbon Footprint "cradle-to-grave"* *
Declared unit (1m of cable = 96 FO )	773,1 g CO <sub>2</sub> -eq.	1 090,1 g CO <sub>2</sub> -eq.
Functional unit (1m of cabled optical fiber)	8,1 g CO <sub>2</sub> -eq.	11,4 g CO <sub>2</sub> -eq.

### Life cycle analysis methodology

Calculation methodology according to the common rules of PCR ed4 and the additional rules of PSR0001 ed4 (Wires & Cables) of the PEPECOPASSPORT Program (compliant with the cable PSR IEC TR 62839-1:2025) with the CO<sub>2</sub> emission factors (GWP) of the EIME 6.3 software and its database in version CODDE-2025-04 (Indicators for PEF EF 3.1 - Compliance PEP ed.4, EN15804+A2 v2.0).

Emission factors used: generic data from the CODDE database supplemented by supplier data when available.

### Description of the Life Cycle

The complete life cycle corresponds to the following stages:

- **Manufacturing:** Production, packaging and transport of raw materials, industrial manufacturing processes, end-of-life treatment of manufacturing waste and packaging of the finished product. Factory located in France - ACOME electricity mix (23,5 g CO<sub>2</sub>e/kWh)
- **Distribution:** transport of the cable with its packaging, over a total distance = 1000km by truck
- **Installation :** 5% installation scrap (manufacturing + transport + end of life) and treatment of the packaging waste
- **Use :** Power loss during transmission at 100% of the time over 20 years
- **End of life of the cable:** Transport 1000 km + pretreatment of waste + steel : 80% recycled + plastics and others : 50% incineration 5C

#### Notes:

\* **Cradle-to-gate:** Life cycle assessment of the product from raw material extraction to the factory gate, excluding distribution, use, and end-of-life stages.

\*\* **Cradle-to-grave:** Full life cycle assessment of the product from raw material extraction through manufacturing, transport, use, and end-of-life (recycling, recovery, or disposal).